



Karndean  
Designflooring

Commercial



Van Gogh Wood

Van Gogh  
RIGID CORE  
GLUEDOWN



# Van Gogh Wood



The iconic Van Gogh range showcases enduring North American style and performance while capturing nature in its rawest form. These stunning looks are highlighted by a variety of effects, including distressed, limed and reclaimed processes in a hardwearing 48" x 7" plank.


A selection of these gluedown visuals are available in an additional rigid core construction, giving you the visuals you want in the construction you need.



**Van Gogh Gluedown** requires familiar gluedown application methods for a secure fit. Choose our gluedown planks if you prefer to personalize your project with design strips or wish to have additional layout flexibility, in applications where sound transmission isn't a concern, or when you prefer the planks be permanently adhered to the subfloor.

**Van Gogh Rigid Core** can be installed over most existing imperfect subfloors with minimal preparation and no need for adhesive. Select rigid core in upper levels to reduce sound transfer by 22dB, over subfloors prone to moisture (up to 95% RH), and over uneven subfloors.

Gluedown		Rigid Core
48" x 7"	Plank Size	48" x 7"
20mil	Wear Layer	20mil
3mm	Thickness	4.5mm
Lifetime	Residential Warranty	Lifetime
15 years	Commercial Warranty	15 years
Begins with VGW	Product Code	Begins with SCB

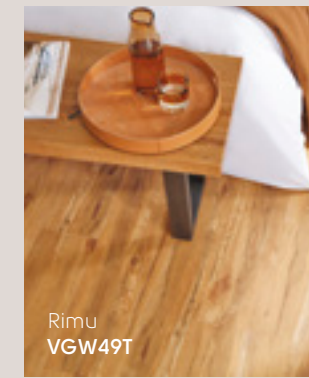


Rimu VGW49T

## Classic

VGW49T – VGW89T

Part of our original Van Gogh range, these planks include a variety of timeless designs, from traditional to rustic. They offer all the beauty and none of the maintenance hassles of real hardwood floors.

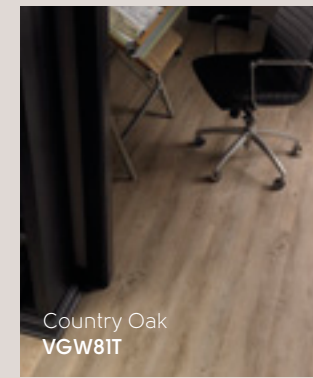


Country Oak VGW81T

## Distressed Oak

VGW81T | VGW139T

The reclaimed look of our distressed oak design evoke a rustic, farmhouse feel but in a range of lighter hues. This design is suited for a wide range of interior styles including rustic, transitional and Scandinavian.

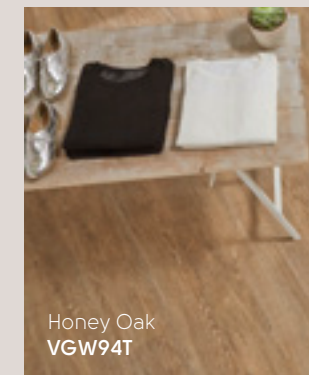


Honey Oak VGW94T

## French Oak

VGW91T | VGW93T | VGW94T

Highlighted by rich, distinctive grains and vibrant colours, our French oaks add beautiful character with a touch of sophistication to your space.

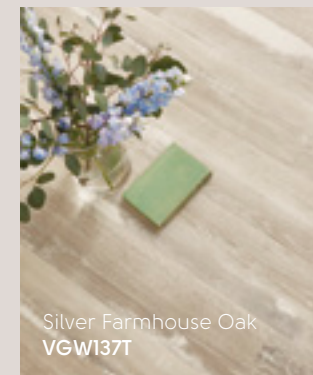


Silver Farmhouse Oak VGW137T

## Farmhouse Oak

VGW136T | VGW137T

Inspired by decades-old painted floorboards from Holland that over time had seen the paint wear away, leaving a patina with remnants of colour across the boards. With a growing trend for painted woods, this design offers a chic look that complements many different interior styles.

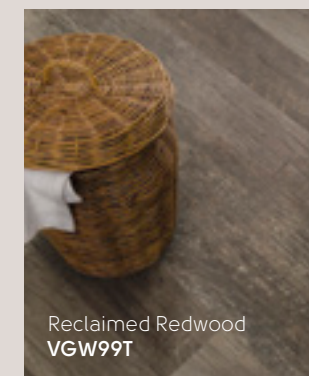


Reclaimed Redwood VGW99T

## American Redwood

VGW99T | VGW100T

Redwoods are among the tallest and oldest trees in the world and grow along the forests on the Pacific Coast, where they are exposed to saltwater air. Our design was developed from a reclaimed railroad tie made of American redwood and captures the aged beauty of the original plank.

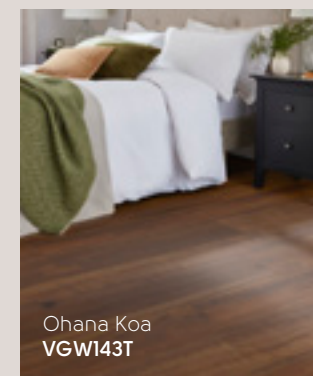


Ohana Koa VGW143T

## Hawaiian Koa

VGW143T

Celebrated for its rippled, flamelike grain structure, Koa is a highly desired wood that cannot be found in hardwood, as its an endangered wood species. Introducing coloring oils to our raw, dampened boards produced both warm and cool hues within the grain.

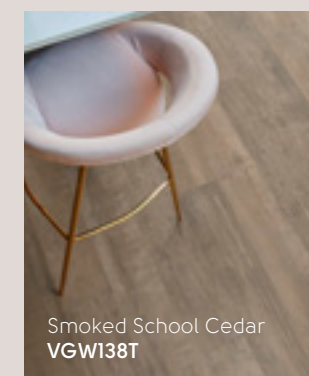


Smoked School Cedar VGW138T

## American Cedar

VGW138T | VGW142T

This design was inspired by a trip to the West Coast, where our team came across reclaimed cedar boards that had been salvaged from a private school in San Diego. The beauty of this wood can be found in its distinctive features.

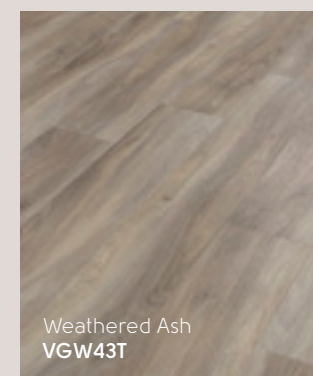


Weathered Ash VGW43T

## Weathered Ash

VGW43T

The wistful soft design of Weathered Ash gives the look and feel of a natural wood floor. Incorporating grey and subtle neutral tones this elegant floor fits perfectly with today's design trends.

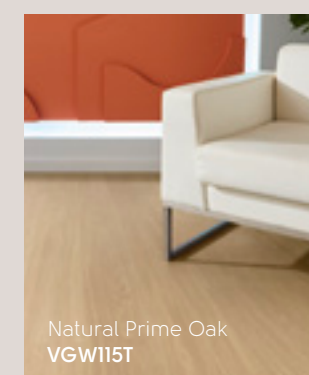


Natural Prime Oak VGW115T

## European Oak

VGW115T

The understated boards that inspired our design were hand-selected with the intention of creating a refined prime oak product, lending itself to the modern trend of minimalism while also providing a base for a timeless interior.

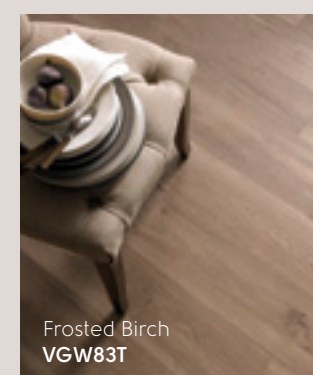

Frosted Birch VGW83T

## Yellow Birch

VGW83T


Inspired by traditional yellow birch, the gentle and soft wood grain combined with a cool, gray-brown colour tone creates a versatile and subtle floor – perfect for projects that require a departure from more common types of wood floors.





Silver Farmhouse Oak **VGW137T\* | SCB137\***

48" x 7" (1219mm x 178mm)

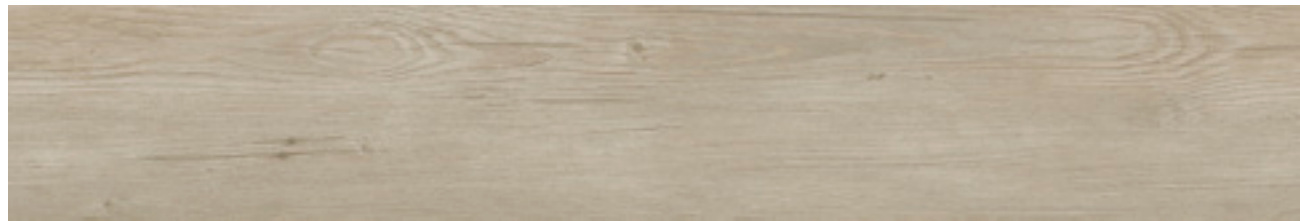

Light Country Oak **VGW139T | SCB139**

48" x 7" (1219mm x 178mm)



Aged Redwood **VGW100T\* | SCB100\***

48" x 7" (1219mm x 178mm)



Weathered Ash **VGW43T**

48" x 7" (1219mm x 178mm)



Country Oak **VGW81T | SCB81**

48" x 7" (1219mm x 178mm)




Frosted Birch **VGW83T | SCB83**

48" x 7" (1219mm x 178mm)




Hessian Oak **VGW93T | SCB93**

48" x 7" (1219mm x 178mm)

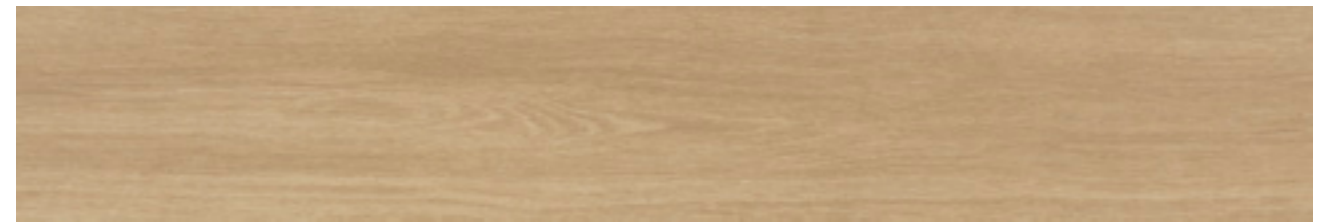


Natural Prime Oak **VGW115T | SCB115**

48" x 7" (1219mm x 178mm)

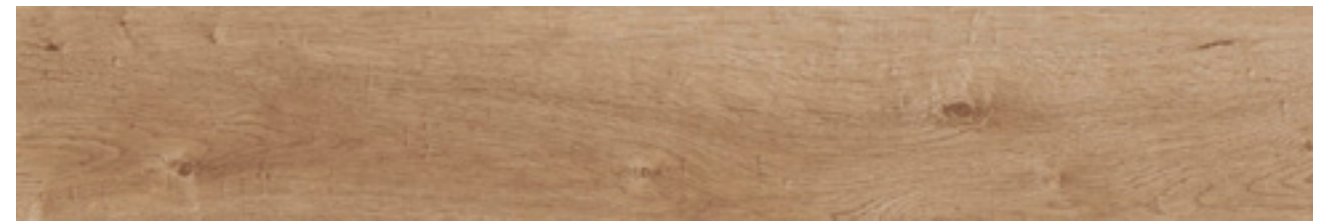

French Oak **VGW85T | SCB85**

48" x 7" (1219mm x 178mm)

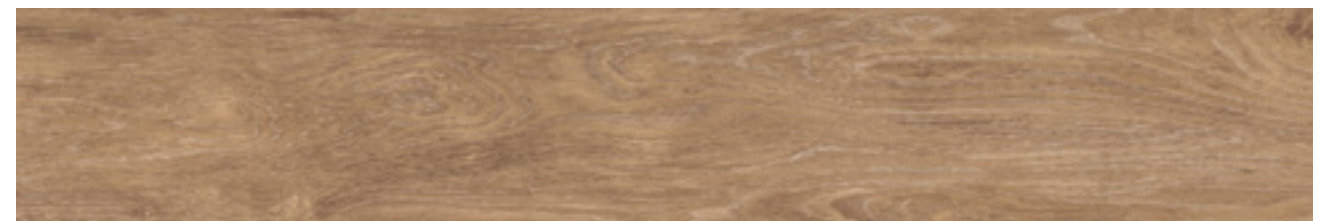


Honey Oak **VGW94T | SCB94**

48" x 7" (1219mm x 178mm)



Blond Farmhouse Oak **VGW136\* | SCB136\***

48" x 7" (1219mm x 178mm)

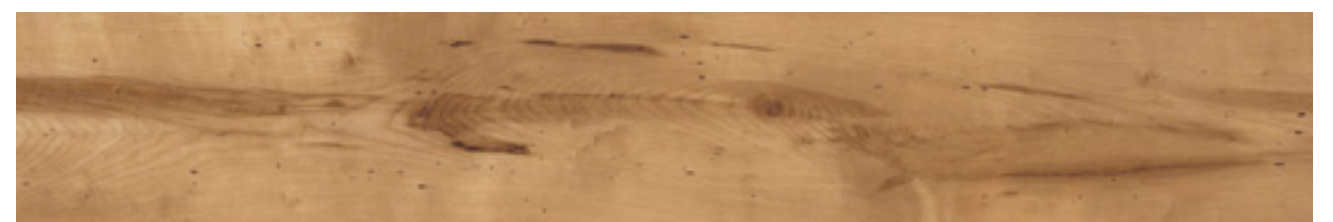

Reclaimed Maple **VGW71T | SCB71**

48" x 7" (1219mm x 178mm)



Vintage Pine **VGW76T\* | SCB76\***

48" x 7" (1219mm x 178mm)



Wellington Oak **VGW53T | SCB53**

48" x 7" (1219mm x 178mm)

**\*Please note:** as a feature of the design, these products incorporate high colour variation between individual planks.






Jatoba **VGW42T | SCB42**

48" x 7" (1219mm x 178mm)



Rimu **VGW49T | SCB49**

48" x 7" (1219mm x 178mm)

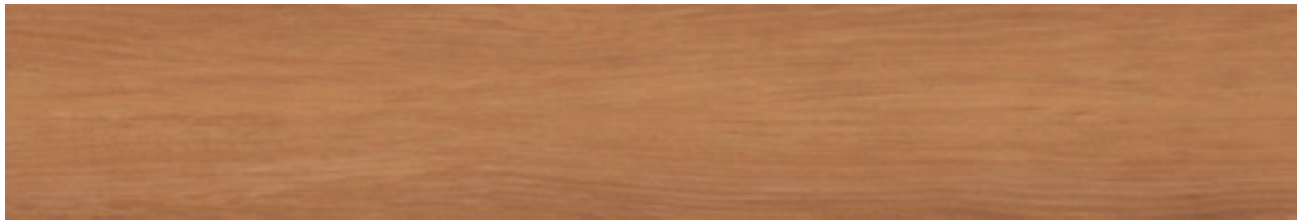

Lancewood **VGW44T | SCB44**

48" x 7" (1219mm x 178mm)



Natural School Cedar **VGW142T\* | SCB142\***

48" x 7" (1219mm x 178mm)




Classic Oak **VGW86T | SCB86**

48" x 7" (1219mm x 178mm)




Smoked Oak **VGW70T | SCB70**

48" x 7" (1219mm x 178mm)

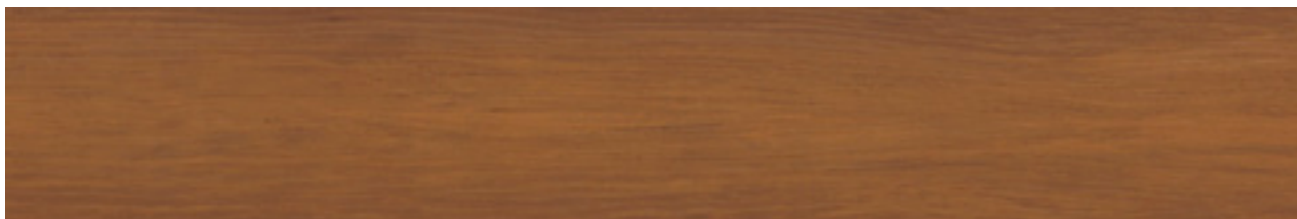


Merbau **VGW41T | SCB41**

48" x 7" (1219mm x 178mm)

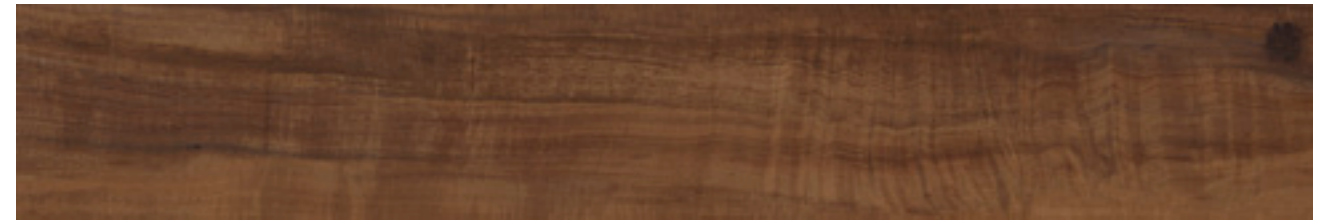

Ohana Koa **VGW143T | SCB143**

48" x 7" (1219mm x 178mm)

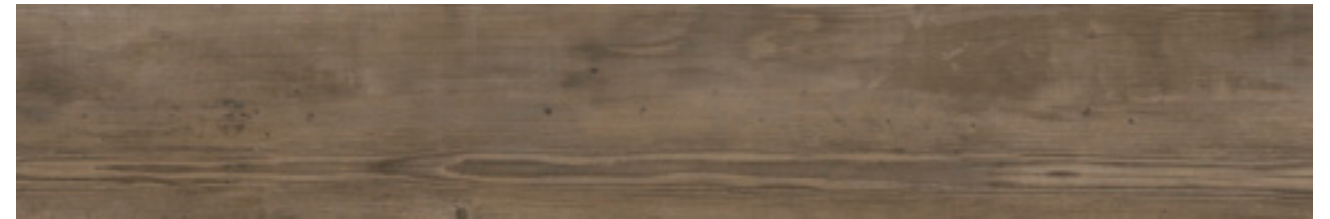

Smoked School Cedar **VGW138T\* | SCB138\***

48" x 7" (1219mm x 178mm)




Reclaimed Redwood **VGW99T\* | SCB99\***

48" x 7" (1219mm x 178mm)




Tawny Oak **VGW91T | SCB91**

48" x 7" (1219mm x 178mm)

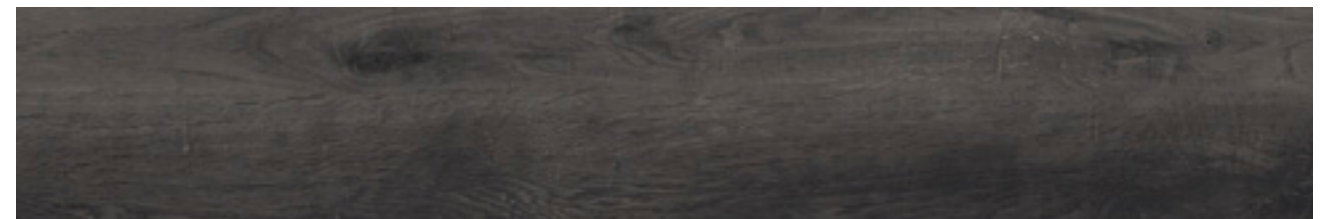

Ebony **VGW89T | SCB89**

48" x 7" (1219mm x 178mm)

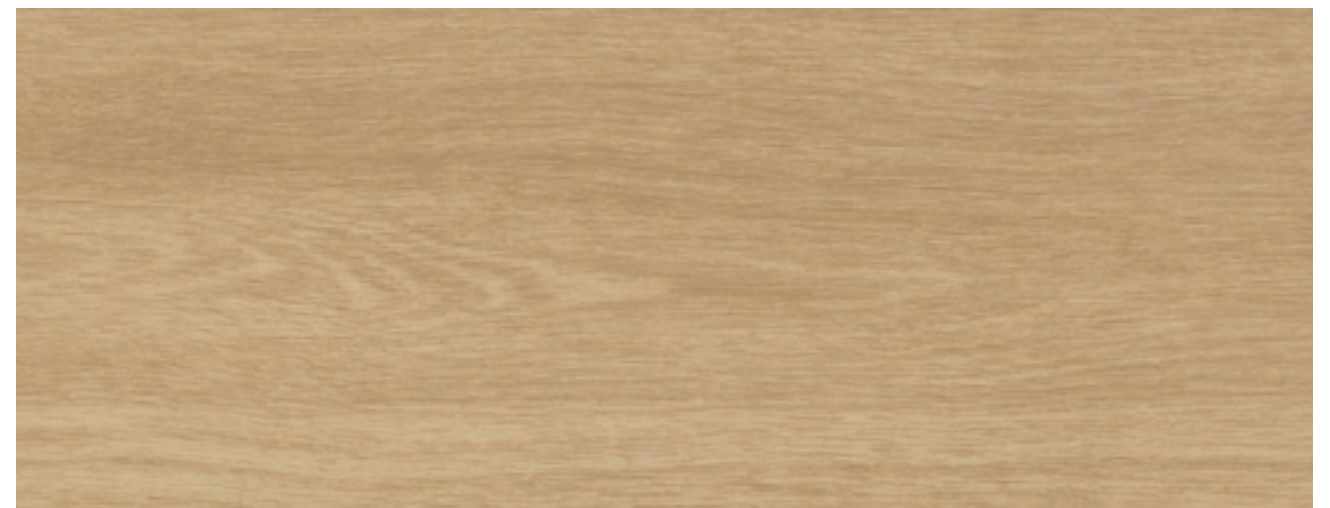

Natural Prime Oak **SCB115 | VGW115T**

48" x 7" (1219mm x 178mm)



### Technical Specification

	Standard	Gluedown Result	Rigid Core Result
<b>Thickness</b>		3.0 mm	4.5 mm
<b>Size</b>		48" x 7"	48" x 7"*
<b>Locking system**</b>			Click locking system
<b>Wear layer</b>		20 mil (0.50 mm)	20 mil (0.50 mm)
<b>Box quantity</b>		35 sq.ft / 15 Planks	23.64 sq.ft / 10 Planks
<b>Surface treatment</b>		K-Guard+® PU coating	K-Guard+® PU coating
<b>Warranty***</b>	Commercial Residential	15 years Lifetime	15 years Lifetime
<b>Standards</b>	ASTM F3261		Pass: Resilient flooring with Rigid Polymeric Core
<b>Beveled edge</b>		Micro	Micro
<b>Classification</b>	ASTM F1700	Class III Type B	
<b>Reaction to fire</b>	ASTM E648-06	Class I	Class I
<b>Smoke density</b>	ASTM E662-06	Pass (<450)	Pass (<450)
<b>Flammability test</b>	FF 1-70; Federal Approval ASTM D2859	Pass	Pass
<b>Slip resistance****</b>	ASTM D2047	Pass (Dry 0.89)	Pass (Dry 0.8)
<b>Staining resistance</b>	ASTM F925	Pass	Pass
<b>Heat fastness</b>	ASTM F1514		Pass
<b>Light fastness</b>	ASTM F1515	Pass ΔE = 3.3	Pass
<b>Electrostatic propensity</b>	AATCC 134		1.1 kV
<b>Abrasion resistance</b>	ASTM D3884 ASTM D4060	115000 cycles	Pass 20000 cycles
<b>Dimensional stability</b>	ASTM F2199  ISO 23999	Pass -0.002"/lin.ft	Pass
<b>Acoustic impact noise reduction</b>	ASTM E2179-09 ASTM E492-09	ΔIIC = 6 dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)	ΔIIC = 22 dB IIC = 69 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
		For settings that require additional noise reduction, contact your Commercial Business Manager for our portfolio of acoustic solutions.	
<b>Indentation-residual</b>	ASTM F 1914		Pass
<b>Environmental</b>	FloorScore® SCS-EC10.3-2014 v4.0  ISO 14001 / ISO 9001  Environmental Product Declaration NSF/ANSI 332  ASSURE CERTIFIED™	Indoor air quality certified; Compliant low emitting VOC emissions.  Manufactured to quality and environment management systems standards  External third-party verified Type III EPD  Sustainability Assessment for Resilient Floor Coverings; Conformant product	Pass      Conformance with Rigid Core Flooring Standard SCS-0011 V1-0
<b>Static load</b>	ASTM F970	1000 psi	Pass 600 psi at 0.005"
<b>Flexibility</b>	ASTM F137	Pass	
<b>Adhesive</b>		DrySet K-Spray® Karndean Epoxy K99 HM	
<b>Recycling</b>		Suitable	Suitable
<b>Phthalate free</b>		Yes	Yes



CERTIFIED BY SCS Global Services



\* Exact size 48.03" x 7.09"

\*\* Produced under Licence from Flooring Industries

\*\*\* Subject to terms, please see our website. Full technical data is available on our website.

\*\*\*\* Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

